Skymen Lab Tools Ultrasonic Bath With 200W Heater And Basket 2.85 Gallon

Basic Information

Place of Origin: ChinaBrand Name: Skymen

Certification: CE ROHS FCC SGS

Model Number: JP-040S
Minimum Order Quantity: 1 unit
Price: Negotiation
Packaging Details: 1 unit per box
Delivery Time: In Stock

• Supply Ability: 8000 pcs per month



Product Specification

JP-040S Model: • Frequency: 40KHz 2.85 Gallon · Capacity: 12*9*6 Inch Tank Size: • Ultrasonic Power: 120W/240W . Heating Power: 200W Material: SUS 304 • G.W: 8.4KG

• Highlight: 30min Timer Ultrasonic Parts Cleaners,

Bench Top Ultrasonic Cleaner SUS304, SUS304 Ultrasonic Cleaning Equipment



More Images







Product Description

Skymen Lab Tools Ultrasonic Bath With 200W Heater And Basket 2.85 Gallon

Model	JP-040S
Ultrasonic Frequency	40KHz
Transducer Quantity	4pcs
Ultrasonic Power	240W/120W
Heating Power	200W
Tank Capacity	10.8L/2.85Gallon
Tank Size	300*240*150mm
Machine size	380*290*280mm
Packing size	440*365*360mm
Net weight	7.6KG
Gross weight	8.6KG
Time Range	1~30 minutes
Temperature Range	Room temperature~80 /176
Tank material	SUS 304
Tank thickness	1mm
Shell material	SUS 201
Shell thickness	0.8mm
Slope panel degree	20°
Drain Valve	/
General switch	/
Degas	/
Semi-wave	/
Lid	/
Basket	/
Voltage	110V; 220V
Plug	European Plug; US plug; Austrslian Plug; British Plu
Detergent suggestion	No stronger acid or alkali
OEM	Yes
OEM MOQ	50pcs
Origin	Guangdong China
Business category	Manufacturer
Lead time	7 days after payment if order quantity is below 20pcs
Payment term	By cash; by credit card; by Paypal
Warranty	1 year

Stainless Bench Top



Model	Capacity	Tank Size	Ultrasonic Power	Heating Power	Frequency	Tank thickness	Material
	(L)	(L*W*H)mm	(W)	(W)	(KHz)	(mm)	SUS304
JP-008	0.8	150*85*65	35	0	40	1	SUS304
JP-009	0.9	150*135*65	60	100	40	1	SUS304
JP-010T	2	150*165*100	60	100	40	1	SUS304
JP-020S	3.2	240*135*100	120	100	40	1	SUS304
JP-030S	4.5	300*150*100	180	200	40	1	SUS304
JP-031S	6.5	300*150*150	180	200	40	1	SUS304
JP-040S	10	300*240*150	240	200	40	1	SUS304
JP-060S	15	330*300*150	360	300	40	1	SUS304
JP-080S	22	500*300*150	480	500	40	1	SUS304
JP-100S	30	500*300*200	600	500	40	1	SUS304

Applications

Commonly used in precision hardware, electronics, semiconductors, watches, jewelry, energy, optics, medicine, automotive manufacturing, electroplating, painting and vacuum coating pretreatment.

Industrial cleaning equipment, ultrasonic cleaning machines are widely used in precision hardware, electronics, semiconductors, watches, jewelry, energy, optics, medicine, automotive manufacturing, electroplating, painting and vacuum coating pretreatment. It is especially suitable for parts with complex surface shapes. Applications

Commonly used in precision hardware, electronics, semiconductors, watches, jewelry, energy, optics, medicine, automotive manufacturing, electroplating, painting and vacuum coating pretreatment.

Industrial cleaning equipment, ultrasonic cleaning machines are widely used in precision hardware, electronics, semiconductors, watches, jewelry, energy, optics, medicine, automotive manufacturing, electroplating, painting and vacuum coating pretreatment. It is especially suitable for parts with complex surface shapes.

Product Show:

PAY ATTENTION ON DETAILS



Insulated handle design

Anti-static and anti-high temperature, more secure







Stainless steel drain valve

One-half inch large drain valve, quicker to drain



Cooling vents

Fast heat dissipation, protecting the circuit board and enhancing the service life







Heat - resistant power cord

One-half inch large drain valve, quicker to drain







Non-slip anti-shock pad Non-slip, safer








Safety switch

With ground insurance switch



Stainless steel cleaning basket

Fine workmanship and durability









Printed surface stainless steel

fingerprint and dirt resisting






2.

SUS304 inner tank

non-welded stamped tank features corrosion and heat resisting

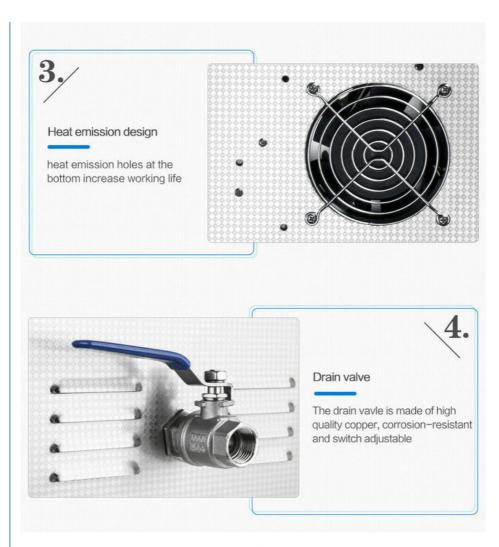



New Upgrade And Tilted Touch Control Pannel Angle of 20 degrees tilted, user-friendly SKYMEN CLEANING OND TEMP OND

JP-040S 10L Product Show

Heating power 200W

Ultrasonic power **240W**

Transducer 4 Pcs


Angle of 20 degrees tilted









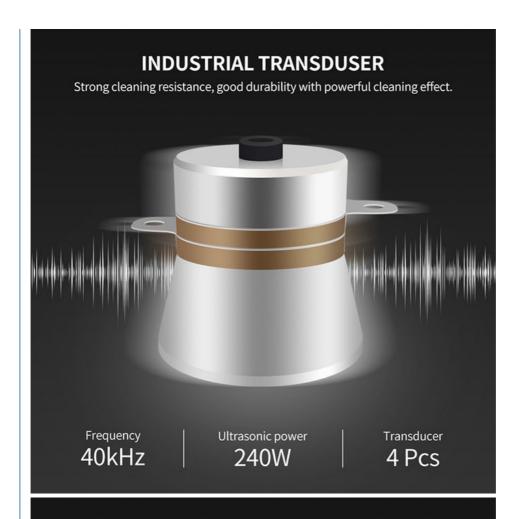

HEATING SYSTEM

Built-in heating board, You can adjust the heating water temperature from 20 to 80°C. It's efficient to remove oil and wax



HEATING BOARD



Heating temperature 20-80°C




Heating power 200W



Application Area:

MULTIPURPOSE CLEANING

It's efficient for most of household items that could be used to clean. get the best cleaning effects with the least effort.

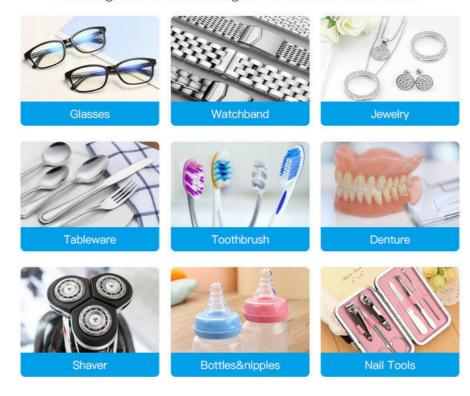





















COMPARISON OF CLEANING EFFECT




























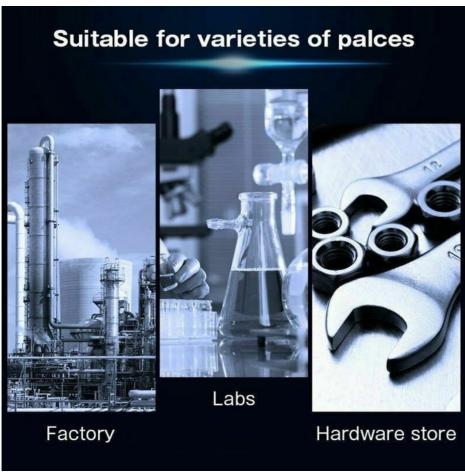



PRODUCT FEATURES

- mechanical timing:
 The working time adjustable from 0-30 minutes or normal open mode.
- mechanical control:
 mechanical control heater, 20-80 adjustable,temperature error within +-2
- high quality bath:
 High quality SUS 304 stainless steel punch forming bath with noise proof
- anti-skid treatment:
 the machine is steady with the non-slip,shock-proof,anti-static,pressure-proof mats at the bottom
- ceramic heater:

 New ceramic heater is stable and efficient
- Humanized design,remarkable cleaning effect:
 Tank capactity over 6L with the drain vavle; high cleaning efficiency, no harm to surface


Industrial Ultrasonic Cleaning Machine



Model	Capacit y	Tank Size	Transducer s	Ultrasonic Power	Heating Power	Tank thickness	Frequency
	(L)	(L*W*H)mm	(pcs)	(W)	(W)	(mm)	(KHz)
JP-120ST	38	500X300X250	12	600	1500	2	28/40
JP-180ST	53	500X350X300	18	900	1500	2	28/40
JP-240ST	77	550X400X350	24	120	3000	2	28/40
JP-300ST	99	550X450X400	30	1500	3000	2	28/40
JP-301ST	99	800X300X400	30	1500	3000	2	28/40
JP-360ST	135	600X500X450	36	1800	4500	2	28/40
JP-480ST	175	700X500X500	48	2400	6000	2	28/40
JP-600ST	264	800X600X550	60	3000	6000	2	28/40
JP-720ST	360	1000X600X600	72	3600	9000	2	28/40
JP- 1108ST	540	1000X900X600	108	5400	18000	2	28/40
JP- 1144ST	960	1200X1000X800	144	7200	27000	2	28/40

Immersible Transducer Plate Image:





Model	Plate Size	Transducer s	Ultrasonic Power	Generator	Suitable tank
	(L*W*H)mm	(pcs)	(W)	(set)	(L)
JP-1006I	305*205*100	6	300	1	10~15
JP-1012I	355*305*100	12	600	1	30~40
JP-1018I	340*280*100	18	900	1	60~70
JP-1024I	430*280*100	24	1200	1	70~80
JP-1030I	460*370*100	30	1500	1	90~100
JP-1036I	550*450*100	36	1800	1	130~140
JP-1048I	600*450*100	48	2400	2	170~180

Immersible Transducer Tube Image:



Model	Tube Size	Transduce rs	Ultrasonic Power	Generat or	Length of wire
	(D*H)mm	(pcs)	(W)	(set)	(M)
JM-1003	57*180	3	150	1	1.5
JM-1006	57*300	6	300	1	1.5
JM-1012	57*550	12	600	1	1.5
JM-1018	57*750	18	900	1	1.5
JM-1024	57*1000	24	1200	1	1.5
JM-1036	57*1520	36	1800	1	

Immersible Transducer Plate/tube can be put in any tank, but it doesn't have heating function.

The price of tube is much higher than plate, Ultrasonic Tube is only used for special purpose, such as in Lab.



Skymen Technology Corporation Limited



86-755-27094405



info@skymen.cc



skymenultrasonic.com

Floor 1st & 2nd, Building 3, Tanggang Taifeng Industrial Park, Dawangshan Community, Shajing Street, Bao'an District, Shenzhen