



4.5L 300W Ultrasonic Instrument Cleaner FCC For Stainless Steel Blade

Our Product Introduction

for more products please visit us on skymenultrasonic.com

Basic Information

- Place of Origin: China
- Brand Name: Skymen
- Certification: CE, ROHS, FCC
- Model Number: JP-030PLUS
- Minimum Order Quantity: 1 unit
- Price: Negotiation
- Packaging Details: Foam carton
- Delivery Time: In Stock



Product Specification

- Tank Volume: 4.5L
- Inner Tank Size: 11.8x5.9x3.9"
- Machine Dimension: 13x7.8x9.3"
- Gross Weight: 5.4KG
- Ultrasonic Power: 180/300W
- Heating Power: 200W
- Highlight: 300W Ultrasonic Instrument Cleaner,
4.5L Ultrasonic Instrument Cleaner,
FCC Portable Ultrasonic Cleaner



More Images



Product Description

Ultrasonic Bath for Stainless Steel Blade With CE 300W Stronger Power Ultrasonic Cleaner

Safe, easy-to-use ultrasonic cleaners from Grainger can be especially effective for cleaning metal and plastic machinery and parts. Choose the size, timing and heat options to fit specific cleaning tasks, such as removing blood, proteins and contaminants from glassware and lab instruments; eliminating dirt, grease, waxes and oils from switches and gears and cleaning flux and contaminants from electronics

Specifications:

| | |
|----------------------------|------------------------------------------------------------------|
| Model No. | JP-030PLUS |
| Function | Ultrasonic cleaning + Hot water cleaning |
| Ultrasonic Frequency | 40kHz |
| Tank Material | SUS 304 |
| Tank Capacity | 4.5 Liter |
| Inner tank dimension | 300*150*100mm / 11.8x5.9x3.9" (Length*width*deep) |
| Machine dimension | 330*200*235mm / 13x7.8x9.3"(Length*width*height) |
| Gross weight of machine | 5.4KG; packed by foam in carton |
| Ultrasonic Power | 180/300W |
| Heating Power | 200W |
| Time setting of Ultrasonic | 0~30 minutes |
| Temperature setting | Room temperature ~ 80°C / 176°F adjustable |
| Drain value | No |
| Lid | Yes |
| Basket | Yes |
| Power supply | 220V, 110V |
| Warranty | 1 Year, free spare parts within 1 year, online technical support |
| Certificate | CE; RoHS; FCC; REACH |
| Lead time | 3 Working days |
| Shipping time | 5~7 day by express |




Same serie machine with different capacity:

| Model | Capacity (L) | Tank Size (L*W*H)mm | Ultrasonic Power (W) | Heating Power (W) | Frequenc y (KHz) | Tank thickness (mm) | Material |
|------------|-----------------|------------------------|----------------------------|-------------------------|------------------------|---------------------------|----------|
| JP-020PLUS | 3.2 | 240*135*100 | 120/180 | 100 | 40 | 1 | SUS304 |

| | | | | | | | |
|------------|-----|-------------|----------|-----|----|---|--------|
| JP-030PLUS | 4.5 | 300*150*100 | 180/300 | 200 | 40 | 1 | SUS304 |
| JP-031PLUS | 6.5 | 300*150*150 | 180/300 | 200 | 40 | 1 | SUS304 |
| JP-040PLUS | 10 | 300*240*150 | 240/480 | 200 | 40 | 1 | SUS304 |
| JP-060PLUS | 15 | 330*300*150 | 360/600 | 300 | 40 | 1 | SUS304 |
| JP-080PLUS | 22 | 500*300*150 | 480/840 | 500 | 40 | 1 | SUS304 |
| JP-100PLUS | 30 | 500*300*200 | 600/1080 | 500 | 40 | 1 | SUS304 |

Cleaning effect show:

Before & After Cleaning Comparison

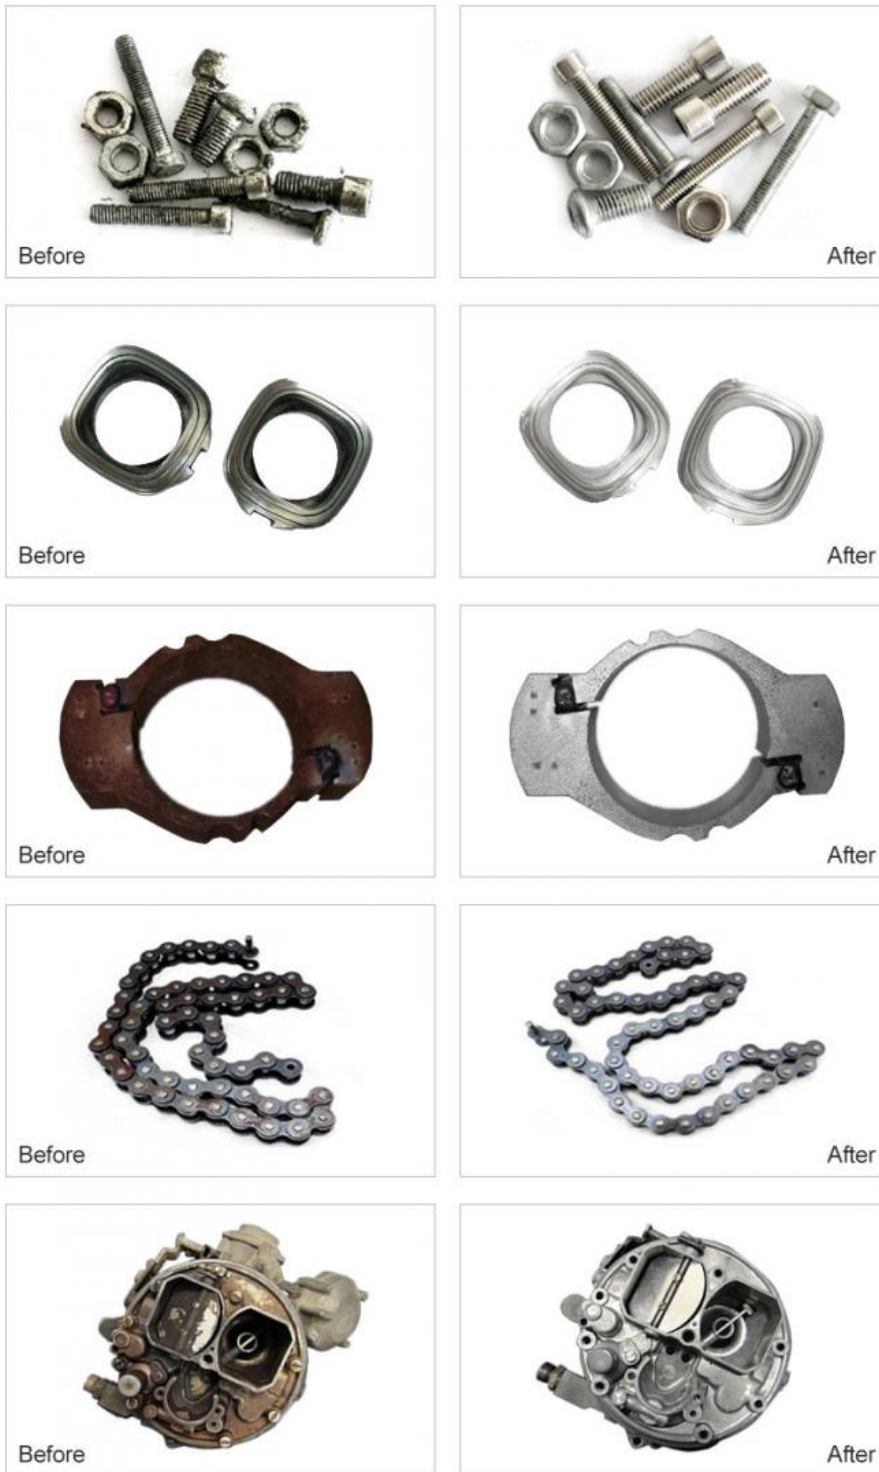

How to Maintain Your Ultrasonic Tool Cleaning Bath

As noted above, loose rust should be scraped or wire brushed before parts are cleaned.

Contaminants that rise to the surface should be skimmed off and disposed of properly.

When the cleaning effectiveness falls off drain the tank and dispose of the solution according to local regulations. Take this time to thoroughly clean the tank following the manufacturer's recommendations.

In summary, dirty or rusted tools and other metal parts such as pumps, gears, and mechanical equipment can often be restored in an ultrasonic cleaner.



Skymen Technology Corporation Limited



86-755-27094405



info@skyman.cc



skymentrasonic.com

